




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61B 17/39	A1	(11) International Publication Number: WO 95/02369 (43) International Publication Date: 26 January 1995 (26.01.95)
<p>(21) International Application Number: PCT/GB94/01504</p> <p>(22) International Filing Date: 11 July 1994 (11.07.94)</p> <p>(30) Priority Data: 9314391.5 12 July 1993 (12.07.93) GB</p> <p>(71) Applicant: GYRUS MEDICAL LIMITED [GB/GB]; Fountain Lane, St Mellons, Cardiff CF3 0LX (GB).</p> <p>(72) Inventor: GOBLE, Colin, Charles, Owen; 5 Osbourne, Clive Crescent, Penarth, South Glamorgan CF64 1AT (GB).</p> <p>(74) Agents: BLATCHFORD, William, Michael et al.; Withers & Rogers, 4 Dyer's Buildings, Holborn, London EC1N 2JT (GB).</p>		<p>(81) Designated States: DE, GB, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: AN ELECTROSURGICAL GENERATOR

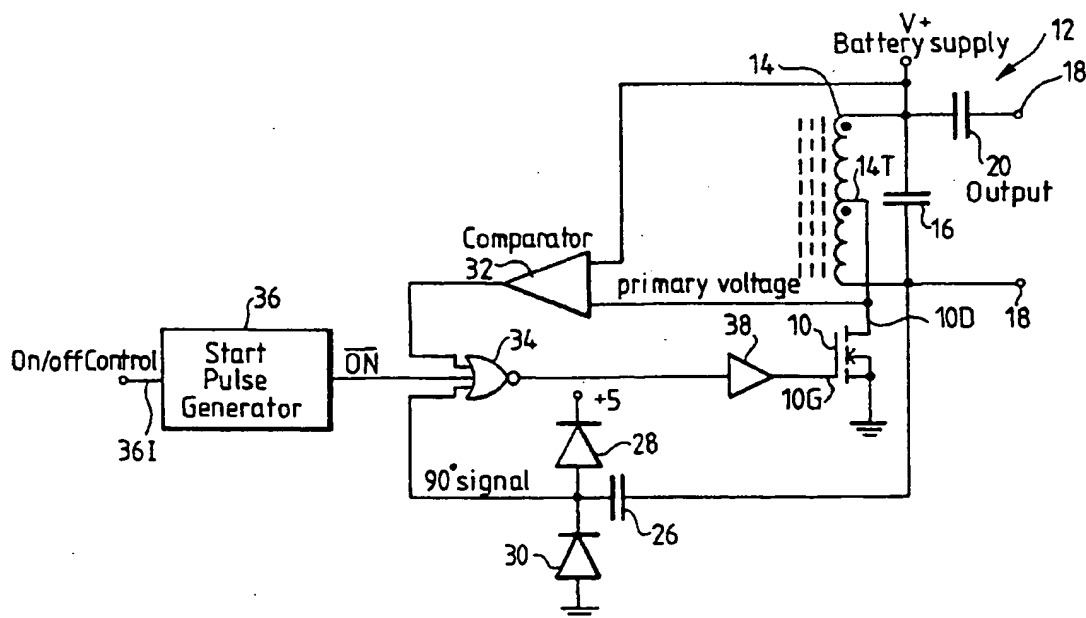

(57) Abstract

In an electrosurgical generator having a self-tuning oscillator which includes a switching device (10) and a resonant output network (12) connected between the switching device (10) and a supply rail (V+), an oscillator feedback circuit (26, 28, 30, 32, 34, 38) feeds to the switching device (10) a switching control pulse signal for separately switching the switching device (10) to its "on" state whilst the voltage across the device (10) is decreasing, the phase of the "on" point being dynamically variable such that the "on" time of the device (10) is adjusted so as to regulate the amplitude of the voltage thereacross. This allows reverse conduction of the switching device (10) to be avoided, giving improved efficiency.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LV	Latvia	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

AN ELECTROSURGICAL GENERATOR

This invention relates to an electrosurgical generator.

5 A radio frequency generator for electrosurgery conventionally has an output isolation transformer coupled to output terminals of the apparatus via a series coupling capacitor the function of which is to prevent low frequency
10 output components causing nerve stimulation in the patient being treated. In electrosurgery, the impedance presented to the output terminals of the generator tends to vary widely, to the extent that the output stage is rarely matched, leading to reflection of power back into the output
15 stage with consequently poor efficiency and unwanted heat dissipation. In this context "matched" means matching of the output impedance of the output stage to the load impedance, i.e. $Z_{out} = Z_{load}$. This effect may be overcome to a large degree by arranging for the output frequency to vary
20 according to the magnitude of the load resistance, as described in published British Patent Application No. 2214430A, the disclosure of which is reported in this specification by reference. This prior apparatus has an output stage consisting of a self-tuning radio frequency
25 oscillator having a power MOSFET driving a resonant output network coupled to the output terminals of the apparatus. The network consists of a transformer, the secondary winding of which is tuned by a parallel capacitor, and by a series coupling capacitor connected between one end of the winding
30 and one of the terminals. It will be appreciated that the frequency of oscillation varies with load impedance, and reflection of power back into the generator can be maintained at relatively low levels over a wide range of load impedances. This is especially beneficial for a
35 battery powered generator having a limited power output capacity. Stray capacitances resulting from connection of the generator to the load have little or no effect on

matching. The prior disclosed apparatus does, however, have disadvantages. One of these is that under extreme load conditions, the only limit to the energy build up in the resonant output circuit is the Q of the circuit itself. If the generator is designed to produce a constant power output, for example, by pulsing the oscillator with a variable mark-to-space ratio according to sensed current drain and supply voltage, under extreme load conditions the oscillator energy at the required constant power is dissipated mainly by the resonant output circuit. Consequently, the output stage needs to be capable of dissipating the maximum design output power and the main oscillator device must be capable of withstanding the voltage levels necessary to achieve such power. Indeed, in bipolar electrosurgery the tissue impedance tends to be between 10Ω and $1K\Omega$, while in monopolar application it tends to be between 100Ω and $10K\Omega$. Since power, $P = V^2/R$ at resonance, the voltage applied to the output device can be \sqrt{PR} , P being the design power of the generator. In a low power generator (having a power output of 10W typically), this may present no particular problems. However, for increased power outputs (for instance, up to 300W) the resonant output circuit must be of heavy construction, and special measures must be taken to protect the output device.

Another difficulty concerns control of the oscillator device, specifically the feedback applied to a control terminal of the device to sustain oscillation. At higher power levels such control cannot be linear in the sense of operating the device as an amplifier so that the output current is proportional to the input voltage or input current, since the device must then dissipate a proportion of the oscillator power. The oscillator device is therefore preferably switched between the fully "on" and fully "off" conditions. Such switching brings the problem of higher harmonics being produced by the oscillator device, which are shunted by the resonant output circuit. This can, to some

extent, be alleviated by switching the device 90° phase-advanced with respect to the resonant output waveform. Nevertheless, in an extreme load condition, which gives very high Q in the resonant output circuit, the 90° advance
5 switching point causes the primary voltage to swing lower than the switching potential, assuming that the oscillator device is coupled between the transformer primary winding and ground. This occurs because the current injection immediately following the "on" instant is very high, the
10 primary voltage at 90° advance usually being higher than the switching supply voltage. With constant power feedback control, this condition is also an unstable one, since as more energy is injected into the resonant output circuit, the primary voltage at the switching-on point becomes
15 progressively higher and therefore the peak switching current also becomes higher. This can lead to reverse biasing of the oscillator device, leading to inefficiency and sometimes to damage of the device. When the device is a power MOSFET, this reverse current flow causes forward
20 biasing of the intrinsic diode which, being a comparatively slow device, then dissipates a significant level of power at radio frequencies. Whilst the reverse bias performance can be improved by coupling an additional fast recovery diode in parallel with the intrinsic diode, any conduction as a
25 result of the transformer primary voltage falling below the switching voltage is inefficient.

It is an object of this invention to provide a generator of improved efficiency.

30

According to this invention, an electrosurgical generator has a radio frequency oscillator comprising at least one switching device, a resonant output network coupled in series with the switching device in a path between power
35 supply rails of opposite polarities, and an oscillator feedback circuit operable to feed to the switching device a switching control pulse signal as an oscillation feedback

signal such that the switching device is cyclically switched to its "on" state whilst the voltage across the switching device is decreasing, the phase of the "on" point being automatically and dynamically variable such that the "on"-
5 time of the switching device is adjusted. The oscillator feedback circuit is preferably operable to retard the "on" point at one or both extremes of the load impedance range of the generator, the phase of the "on" point being variably retarded so as to lag positive or negative peaks of the
10 output signal voltage from the resonant output network by between 0° and 120° . By allowing the phase of the "on" point to be retarded when conditions require, the current surge that occurs when the switching device is switched to its "on" state is less severe due to the voltage across the
15 switching device (generally the primary voltage of an output network transformer) being lower. In this way, it is possible to limit the primary voltage amplitude so that reverse conduction of the switching device can be largely avoided.

20

The feedback circuit may be such that the "on" point is arranged to coincide with the voltage across the switching device falling to a predetermined threshold value which is equal to or greater than the potential difference between
25 the supply rails of the power supply powering the switching device. The peak voltage across the switching device may exceed the supply voltage by a considerable margin and it is preferred that the threshold value is nearer to the supply voltage than the said peak voltage.

30

In the case of the resonant output network including a transformer having a primary winding coupled in series with the switching device, the feedback circuit may be arranged to produce a timing signal in response to the voltage across
35 the primary winding crossing a predetermined threshold. Thus, the primary winding may have one end coupled to one of the supply rails, and the feedback circuit may include a

comparator arranged to compare the voltage at the other end of the primary winding with a threshold voltage equal or approximately equal to the voltage of the said one supply rail.

5

Preferably, the feedback circuit is arranged such that the switching device is cyclically switched to its "off" state in the region of a positive or negative peak of the output signal voltage from the resonant network occurring between 10 0° and 180° after the switching to the "on" state. In this way, by retarding the phase of the switching "on" with respect to the "off" point, the "on" time of the switching device is reduced, leading to reduced input energy in the resonant output network under extreme load conditions. 15 Thus, for a given output power rating, the power handling capability of the resonant output network can be reduced, as can the output voltage rating of the switching device.

In the preferred embodiment of the invention, the feedback 20 circuit includes means coupled to the resonant output network for deriving a phase-shifted pulse signal having a pulse edge in the region of the above-mentioned positive or negative output signal voltage peak. These deriving means are associated with a logic circuit having one input coupled 25 to the output of the deriving means to receive the phase-shifted pulse signal and another input coupled to an output of the comparator to produce the switching control pulse signal with pulses each of which begins when the comparator indicates that the voltage across the primary winding equals 30 the threshold voltage, and ends at the said pulse edge of the phase-shifted pulse signal. The deriving means may comprise a capacitive filter and a squaring circuit which are operable together to produce a pulse signal as a squared representation of the output signal voltage from the 35 resonant network, shifted by approximately 90°. The logic circuit preferably produces an "on" signal when both of the said inputs are in the same, predetermined logic condition.

To aid starting of the oscillator, the comparator may be biased such that when the switching device is in its "off" state and the oscillator quiescent, the comparator output is in a logic state which, in the presence of a start signal, causes the switching device to be switched to its "on" state. The logic circuit may have a third input coupled to receive the start signal.

The resonant network may include an auto-transformer having a primary winding coupled between the switching device and the supply rail and/or an AC earth, and a secondary winding coupled to an output terminal of the oscillator. In this case, the feedback circuit preferably includes a feedback link with a series-connected capacitor coupled to the secondary winding for deriving a phase-shifted signal representative of the output signal voltage phase-shifted by approximately 90° .

Alternatively, for mains powered use, the resonant network may include a transformer having a primary winding coupled between the switching device and a supply rail and/or an AC earth, and a secondary winding DC-isolated from the primary winding and coupled to an output terminal of the oscillator. In this latter case, the feedback circuit preferably includes a feedback link comprising an RC network having a series resistance and a downstream parallel capacitance, and a squaring circuit which, together with the RC network, is operable to produce a phase-shifted signal representative of the output signal phase-shifted by 90° , the feedback link being coupled to the primary winding.

For simplicity, and for rapid response to the rapid changes in impedance which typically arise in electrosurgery, the oscillator is preferably self-tuning, in that the resonant network comprises a transformer having a primary winding coupled between the switching device and a supply rail and/or AC earth, and a secondary winding, a first tuning

capacitance coupled across the secondary winding, and second coupling capacitance coupled to one end of the second winding for connection to the load. Thus, when the oscillator is connected to the load, the frequency of oscillation varies automatically according to the impedance of the load in order to maintain a substantial impedance match over a range of load impedance values. In order to maintain a substantially constant output over a range of load impedances, the oscillator may include a power control circuit for pulsing the oscillator at a pulse repetition rate which is much lower than the frequency of oscillation, the pulse duty cycle being varied to maintain the output of the oscillator substantially constant. The power control circuit may comprise means for monitoring the current drawn from the supply rails by the oscillator and the supply rail voltage, a multiplier coupled to the monitoring means for deriving a product signal representative of output power, and a circuit arrangement for altering the pulse duty cycle according to the value of the product signal.

20

The generator may be monopolar or bipolar. A bipolar generator has a pair of output terminals for connection to an electrosurgical or diathermy load, the terminals preferably being coupled to opposite ends of the secondary winding of the transformer, with at least one of the terminals being coupled via a series coupling capacitor to achieve matching with varying load impedance as mentioned above.

30 The invention will now be described by way of example with reference to the drawings in which:-

Figure 1 is a circuit diagram of a self-tuning oscillator of an electrosurgical generator;

35

Figures 2A to 2D are waveform diagrams relating to an oscillator in which the oscillating device is driven by a square wave control signal;

- 5 Figure 3 is a circuit diagram of a first self-tuning oscillator of an electrosurgical generator in accordance with the invention;

Figures 4A to 4F are waveform diagrams relating to the
10 oscillator of Figure 3; and

Figure 5 is a further self-tuning oscillator.

Referring to Figure 1, a prior art electrosurgical generator
15 has a self-tuning oscillator with a MOSFET oscillator device 10 coupled in series with a resonant output network 12 between a positive voltage supply rail V+ and earth. The resonant network 12 has an inductor configured as an auto-transformer 14 with a parallel tuning capacitance 16 coupled
20 across the complete winding and a pair of output terminals 18, one of which is isolated from the transformer 14 and parallel capacitor 16 by a series coupling capacitor 20. One portion of the transformer secondary winding acts as a primary winding 14P which is coupled between the supply V+
25 and the drain terminal of the MOSFET 10. A feedback circuit 22 links one end of the secondary winding to a gate terminal 10G of the MOSFET 10. A generator having such an oscillator is described in more detail in the above-mentioned British Patent Application No. 2214430A. It will be noted that this
30 particular oscillator has two output terminals 18, representing the outputs of a bipolar electrosurgical generator which, in use, are connected to an electrosurgical load 24.

35 It is well known that the load presented to an electrosurgical generator varies widely and very rapidly according to the particular operation being performed and,

for example, the movements of the electrosurgical instrument with respect to the tissue being treated. As described in the above-mentioned patent, a resonant network such as that shown in Figure 1, having both a parallel tuning capacitor
5 across the transformer secondary and a series coupling capacitor allows the oscillator to be matched to the load as the load impedance varies.

Conventionally, the feedback circuit 22 is a capacitor. If
10 the feedback voltage applied to the gate terminal 10G of the MOSFET 10 is squared so that the MOSFET is driven between the fully "on" and fully "off" states in order largely to avoid power dissipation in the MOSFET 10, the signals at different points in the oscillator circuit have the form
15 shown in Figures 2A to 2C. The waveform of Figure 2A represents the output voltage across the secondary winding. In this diagram, the mean voltage is shown by a horizontal line. The primary voltage waveform for infinite load impedance is shown in Figure 2B. This has a non-sinusoidal
20 shape by virtue of the square wave drive to the MOSFET gate 10G, as shown by the waveform of Figure 2C. The drive waveform is, in effect, advanced by 90° with respect to the output voltage so that the MOSFET is switched to its "on" state 90° before the zero-crossing of the output voltage
25 waveform (zero-crossing meaning here the crossing of the mean voltage line) so that current is drawn from the resonant network through the MOSFET before the corresponding voltage peak (a negative peak in Figure 2A). At the 90° phase-advanced switch point the primary voltage on the drain
30 terminal of MOSFET 10 may be higher than the supply voltage V_+ when the load impedance is high, with the result that the current injection occurring immediately after the "on" time is very high. It is this current injection which causes the primary voltage, as shown in Figure 2B to change very
35 rapidly and, in certain conditions to swing lower than the switching potential on the MOSFET (which here switches to ground), producing reverse conduction through the MOSFET.

This effect is visible in Figure 2B as negative pulses below the zero voltage line. The MOSFET current I_D is shown in Figure 2D. As has been described above, this is an undesirable condition, leading to inefficiency and potentially to damage of the MOSFET 10.

As will be seen from Figure 2C, the "off" point of the control signal applied to the gate terminal of the MOSFET 10 corresponds approximately to the instant of the peak of the output voltage waveform following switching on and is, therefore, 90° phase-advanced with respect to the corresponding part of the output voltage waveform.

An improved generator in accordance with the invention is illustrated in Figure 3. Like the generator of Figure 1, this is intended to be used primarily as a battery powered generator. In common with the oscillator of Figure 1 a MOSFET 10, the oscillator has a resonant output network 12 comprising a transformer 14, a parallel capacitor 16, and a series coupling capacitor 20. Bipolar output terminals 18 are provided for connection to an electrosurgical instrument. The transformer 14 is an auto transformer, the output for application to the electrosurgical instrument being developed across the secondary winding represented by the full winding of the transformer 14, the primary winding being represented by part of the full winding, in this case the upper portion of the winding as shown in Figure 3, with the tap 14T being connected to the drain terminal 10D of the MOSFET 10.

30

The feedback circuit of this improved oscillator is arranged in two parts. The first part comprises a feedback link having a series connected feedback capacitor 26 the output side of which is clamped between +5V and earth by diodes 28, 30 to provide a squared 90° phase-advanced signal similar to that shown in Figure 2C, but inverted. The other part of the feedback circuit comprises a comparator 32 having a

first input coupled to the junction of the transformer 14 and the drain terminal of the MOSFET 10 which carries the transformer primary voltage, and a second input coupled to the supply rail V+. The comparator thus compares the primary voltage with a threshold voltage equal to the supply voltage to produce a square wave at its output which is presented to one input of a NOR gate 34, another input of which is coupled to the clamped output side of the feedback capacitor 26. NOR gate 34 has a third input which, when the oscillator is active is held low by a start pulse generator 36 having an on/off control input 36I. It will be seen that all three inputs of the NOR gate 34 must be driven low for the output to be positive. Otherwise the output is negative. This NOR gate 34 provides a pulsed control signal via a buffer amplifier 38 for the gate 10G of the MOSFET 10. The polarities of the signals obtained from the comparator 32 and the clamped output of the capacitor 26 are such that a positive drive pulse is provided to the MOSFET 10 only when the primary voltage is lower than the voltage threshold (here the battery supply voltage V+) and the 90° signal from the capacitor 26 indicates that the output voltage from the resonant output network 12 is falling from a positive peak to a negative peak.

The result of these measures is shown in the waveform diagrams of Figures 4A to 4E. The output voltage across the secondary winding of the transformer 14 is shown in Figure 4A and is a sinusoid of a frequency equal to the resonant frequency of the network 12. The primary voltage is shown in Figure 4B, this being the voltage at the junction between the MOSFET drain connection 10D and the transformer 14, while the output from the comparator 32 resulting from the comparison of this primary voltage with a threshold voltage approximately equal to the supply voltage V+ is a pulsed signal as shown in Figure 4C. (It should be noted here that the threshold voltage in Figure 4B is a little higher than the supply voltage, since in one preferred embodiment of the

- invention, potential dividers connected between the supply $V+$ and the comparator on the one hand and between the primary voltage connection and the comparator on the other hand are arranged to select a somewhat higher threshold.
- 5 This also has the effect of biasing the comparator output to the negative state in order that the oscillator may be started when a negative-going start pulse is produced by the start pulse generator 36.)
- 10 The 90° phase advanced signal produced at the clamped output of the capacitor 26 is shown in Figure 4D, from which it will be seen that the phase-advanced signal is a simple square wave 90° phase-advanced with respect of the output voltage of Figure 4A. Providing the output of the start
- 15 pulse generator 36 is low, the control signal obtained from the output of the NOR gate 34 takes the form shown in Figure 4E, i.e. positive pulses coinciding with the incidence of low input states from both the comparator 32 and the capacitor 26. The result is that the MOSFET 10 is switched
- 20 on cyclically at an instant which is retarded with respect to the 90° advanced point but is still switched "off" in the region of the first peak of the output voltage following switch on (i.e. in the region of a null of the differential dv/dt of the output voltage).
- 25 Referring now to Figure 4B, it will be seen that, since the primary voltage is lower when the MOSFET 10 is switched "on" than with the switching scheme of Figure 2C, the primary voltage in the no-load condition does not cross below the
- 30 switching potential represented by the base line of the diagram in Figure 4B, nor does the device current I_D exhibit reversals (see Figure 4F). Consequently, inefficient and potentially damaging reverse conduction is avoided. Furthermore, since the "on" point is retarded, but the "off"
- 35 point remains substantially coincident with the output voltage peak, the total "on" time of the MOSFET is reduced with respect to the arrangement represented by the waveform

diagrams Figures 2B and 2C, leading to reduced power consumption at the extremes of load impedance, thereby avoiding excessive power dissipation in the resonant output network. Since the triggering of the MOSFET 10 is dependent
5 on the amplitude and shape of the primary voltage waveform, the "on" duration of the MOSFET varies according to the load impedance appearing at the output terminals 18 (see Figure 3). It has been found that use of this switching arrangement results in very high energy conversion
10 efficiencies over relatively large load impedance ranges. In practice, it is possible to achieve greater than 70% efficiency for maximum power over a load impedance range of 10Ω to 1000Ω , representing a tenfold change in both current and voltage output.

15

A power control feedback loop may be included, operable to pulse the MOSFET oscillator by applying a relatively low frequency pulsed control input to the start pulse generator 36. Details of a suitable power control circuit are shown
20 in the above-mentioned British Patent Application No. 2214430A. With such a control circuit, the enhanced conversion efficiency yielded by the circuitry of the invention allows the load impedance/power characteristic to be tailored flat over an extended load impedance range
25 without excessive resonant circuit dissipation or excessive stress on the switching MOSFET 10, the variable phase-advance switching limiting the maximum output voltage (no-load condition) and maximum current (short circuit load). These advantages give rise to reduced power supply
30 requirements and the possibility of cheaper components for a given required power output.

The circuitry of Figure 3 is intended for battery supplied electrosurgical apparatus. Where the apparatus is mains
35 supplied, additional isolation is required, preferably in the form of an output RF transformer with an isolated secondary, as shown in Figure 5. As before, the primary

winding is coupled between the supply V+ and the drain terminal 10D of a MOSFET 10. The isolated secondary winding 40S of the transformer 40 is coupled to the output terminals 18 in the same way as the secondary portion of the auto transformer 14 of the oscillator of Figure 3.

Whereas in the oscillator of Figure 3 it is possible to use a feedback signal directly from the output stage due to the absence of a need for d.c. isolation, the mains driven oscillator requires alternative means for generating the 90° phase-advanced signal. In this case, then, in the oscillator of Figure 5 the feedback circuit includes a single pole low pass filter comprising RC network 42, 44 connected to receive the primary voltage available at the junction of the primary winding 40P and the drain terminal 10D of the MOSFET 10, followed by an inverted 46. This actually produces a delayed 90° signal but does not affect the operation of the MOSFET. A comparator 32 is arranged to compare the primary voltage with the supply voltage V+ or, preferably, a voltage slightly higher.

At this point it should be mentioned that the delayed 90° phase-advanced signal produced by the low pass filter and squaring inverter arrangement 42, 44, 46 would, on its own, not allow the oscillator to start when power is first applied, since no 90° phase-advanced signal is available for the first cycle of oscillation. This difficulty is overcome by the start pulse generator 36 being arranged to produce a negative pulse. In fact, the pulse start duration is relatively short (typically 50 - 100 ns). In both circuits, (i.e. the oscillators of Figure 3 and Figure 5) the short duration of this pulse limits the initial current surge so that the possibility of damage to the MOSFET 10 is reduced. Subsequently, excessive current is avoided by the retarded "on" instant as described above.

The embodiments of Figures 3 and 5 both include single-sided switch arrangement in that current through the primary winding of the transformer 14 or 40 is controlled by switching means 10 on one side only of the winding. It should be mentioned that the invention includes within its scope a push-pull arrangement which would be advantageous at high power levels because the resulting balancing-out of DC current components allows a smaller transformer core to be used for a given power rating by virtue of the raising of the effective transformer core saturation point.

The oscillator operates within the range 200 kHz to 2 MHz. The preferred frequency of operation at the middle of the load range is typically in the region of 500 kHz.

CLAIMS

1. An electrosurgical generator having a radio frequency oscillator comprising at least one switching device, a resonant output network coupled in series with the switching device in a path between power supply rails of opposite polarities, and an oscillator feedback circuit operable to feed to the switching device a switching control pulse signal as an oscillation feedback signal such that the switching device is cyclically switched to its "on" state whilst the voltage across the switching device is decreasing, the phase of the "on" point being dynamically variable such that the "on"-time of the switching device is adjusted to regulate the amplitude of the voltage across the switching device.
2. A generator according to claim 1, wherein the oscillator feedback circuit is operable to retard the "on" point at at least one extreme of a load impedance range of the generator.
3. A generator according to claim 1 or claim 2, wherein the phase of the "on" point is retarded so as to lag a positive or negative peak of the output signal voltage from the resonant output network by values between 0° and 120° .
4. A generator according to any preceding claim, wherein the feedback circuit is operable such that the "on" point coincides with the existence of a predetermined instantaneous voltage value across the switching device.
5. A generator according to claim 4, wherein the predetermined voltage value is at least as great as the

potential difference between the supply rails of the oscillator.

- 5 6. A generator according to claim 5, wherein the predetermined voltage value is greater than the potential difference between the supply rails of the oscillator but closer to the said potential difference than to the peak instantaneous voltage value across the switching device.
- 10 7. A generator according to any of claims 1 to 3, wherein the resonant output network includes a transformer having a primary winding coupled in series with the switching device, and wherein the feedback circuit is
15 operable to produce a timing signal in response to the voltage across the primary winding crossing a predetermined threshold.
- 20 8. A generator according to claim 7, wherein the primary winding has one end coupled to one of the supply rails, and the feedback circuit includes a comparator arranged to compare the voltage at the other end of the primary winding with a threshold voltage equal or approximately equal to the voltage of the said one supply rail.
- 25 9. A generator according to any preceding claim, wherein the feedback circuit is operable such that the switching device is cyclically switched to its "off" state in the region of a positive or negative peak of
30 the output signal voltage from the resonant network occurring between 0° and 180° after the switching to the "on" state.
- 35 10. A generator according to claim 8 and claim 9, wherein the feedback circuit includes means coupled to the resonant network for deriving a phase-signal pulse signal having a pulse edge in the region of the said

positive or negative peak, and a logic circuit having one input coupled to the deriving means to receive the phase-shifted pulse signal and another input coupled to an output of the comparator to produce the switching control pulse signal with pulses each beginning when the comparator indicates that the voltage across the primary winding equals the threshold voltage and ending at the said pulse edge of the phase-shifted pulse signal.

10

11. A generator according to claim 10, wherein the deriving means comprises a capacitive filter and a squaring circuit operable together to produce a pulse signal which is a squared representation of the output signal voltage from the resonant network shifted by approximately 90° , and wherein the logic circuit produces an "on" signal when both of the said inputs are in the same, predetermined logic condition.

12. A generator according to any of claims 8, 10 and 11, wherein the comparator is biased such that when the switching device is in its "off" state and the oscillator is quiescent, the comparator output is in a logic state which, in the presence of a start signal, causes the switching device to be switched to its "on" state.






13. A generator according to claim 12 and claim 10 or claim 11, wherein the logic circuit has a third input coupled to receive the start signal.


14. A generator according to any preceding claim, wherein the resonant network includes an auto-transformer having a primary winding coupled between the switching device and a supply rail and/or an a.c. earth, and a secondary winding coupled to an output terminal of the oscillator.

15. A generator according to claim 14 and claim 9, wherein the feedback circuit includes a feedback link with a series connected capacitor coupled to the secondary winding for deriving a phase-shifted signal representative of the output signal voltage phase-shifted by approximately 90° .
16. A generator according to any of claims 1 to 13, wherein the resonant network includes a transformer having a primary winding coupled between the switching device and a supply rail and/or an a.c. earth, and a secondary winding d.c. isolated from the primary winding and coupled to an output terminal of the oscillator.
17. A generator according to claim 16, wherein the feedback circuit includes a feedback link comprising an RC network having a series resistance and a downstream parallel capacitance, and a squaring circuit which, together with the RC network, is operable to produce a phase-shifted signal representative of the output voltage signal phase shifted by 90° , the feedback link being coupled to the primary winding.
18. An electrosurgical generator according to any preceding claim, wherein the oscillator is self-tuning and the resonant network comprises
- a transformer having a primary winding coupled between the switching device and a supply rail and/or a.c. earth, and a secondary winding,
 - a first, tuning, capacitance coupled across the secondary winding, and
 - a second, coupling, capacitance coupled to one end of the secondary winding for connection to a load,
- whereby when the oscillator is connected to the load the frequency of oscillation of the oscillator varies automatically according to the impedance of the

load in order to maintain a substantial impedance match over a range of load impedance values.

19. A generator according to claim 18, including a power control circuit for pulsing the oscillator at a pulse repetition rate which is much lower than the frequency of oscillation, the pulse duty cycle being varied to maintain the output power of the oscillator substantially constant over a range of load impedance values.
20. A generator according to claim 19, including means for monitoring the current drawn from the supply rails by the oscillator and the supply rail voltage, a multiplier coupled to said monitoring means for deriving a product signal representative of the output power, and a circuit arrangement for altering the said pulse duty cycle according to the value of the product signal.
21. A generator according to any of claims 18 to 20, having a pair of output terminals for connection to an electrosurgical load, the terminals being coupled to opposite ends of the secondary winding of the transformer, at least one of the terminals being so coupled via a series coupling capacitor.

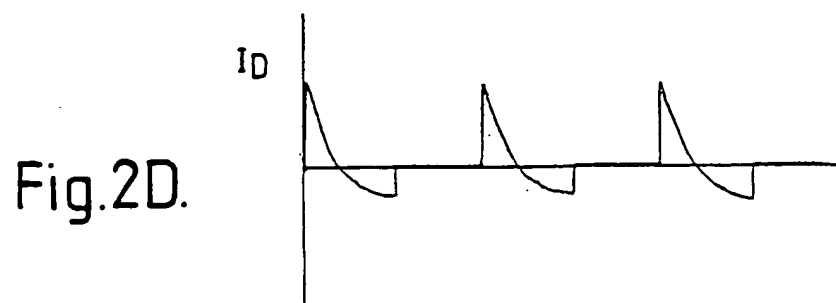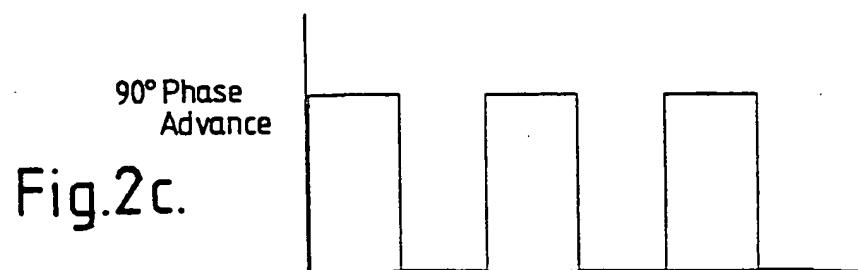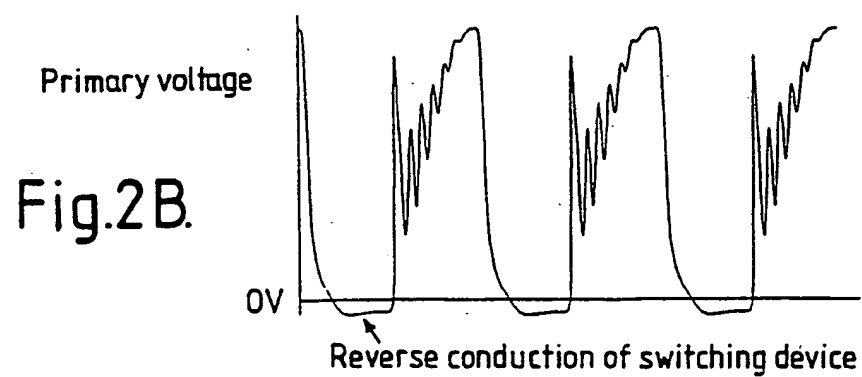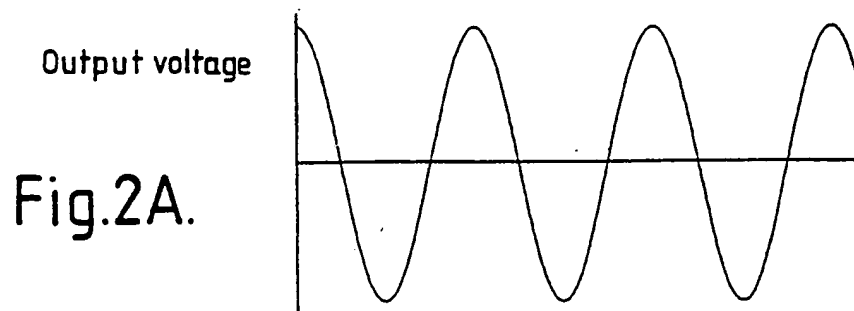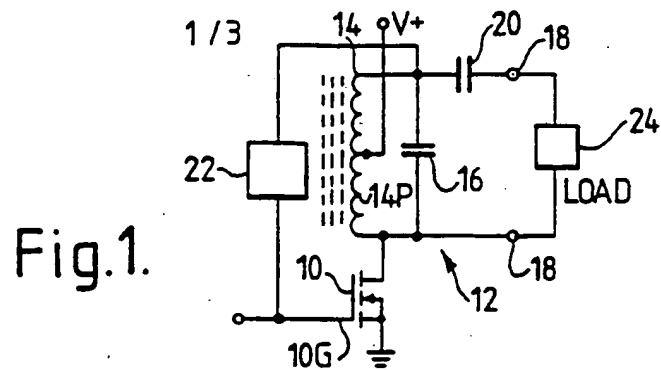


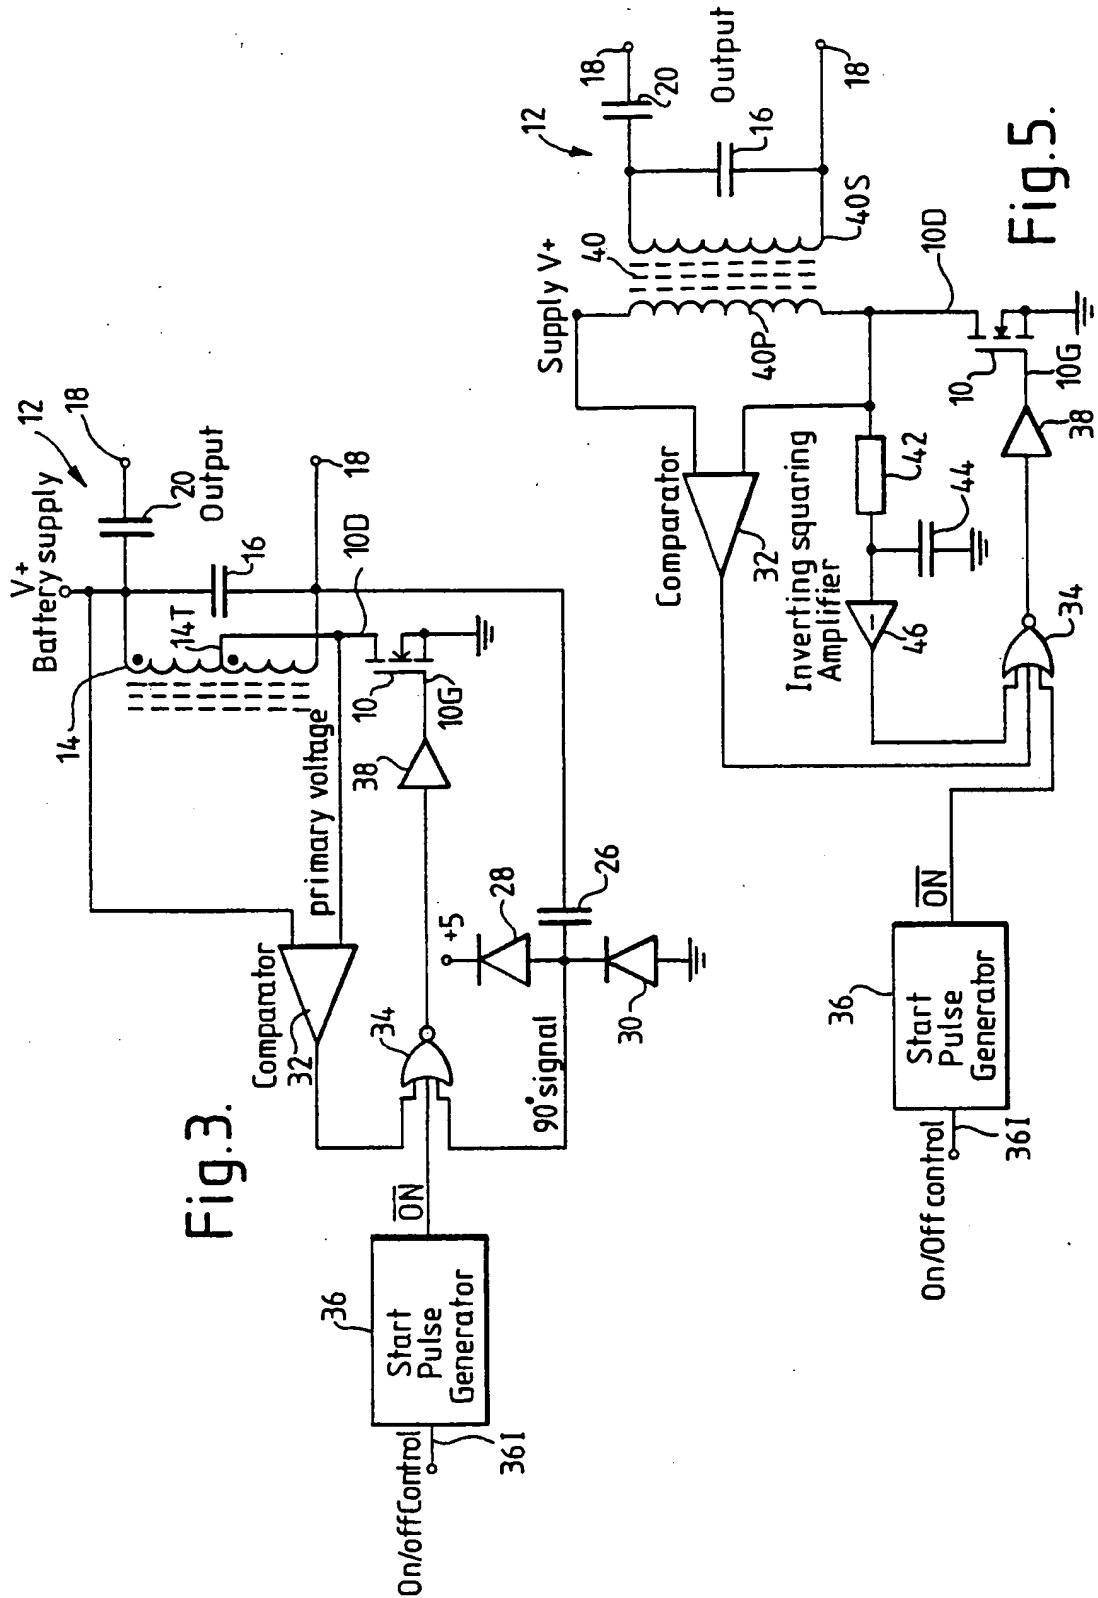

3/3

Output voltage.


Fig.4A.

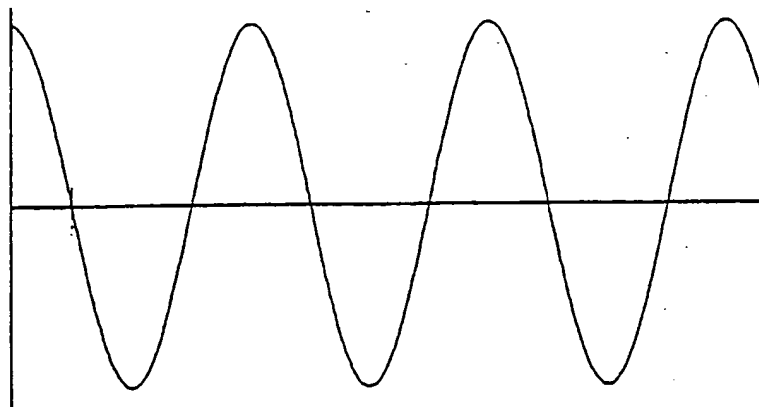

Primary voltage

'On' threshold
Supply

Fig.4B.

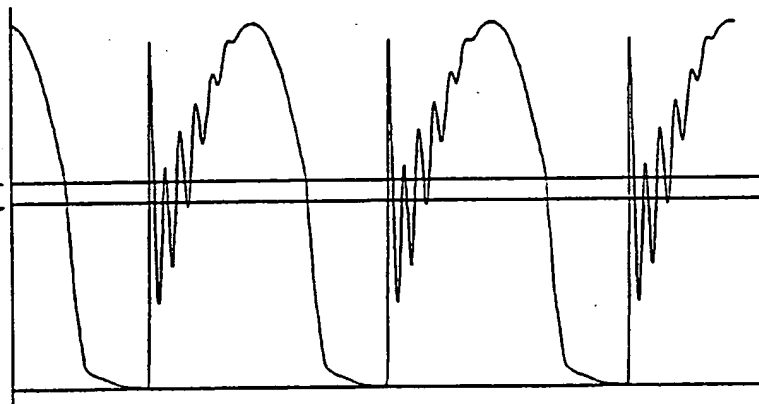


Voltage controlled
'on' signal

Fig.4C.



90° Phase Advance
Derived from either
primary or secondary

Fig.4D.

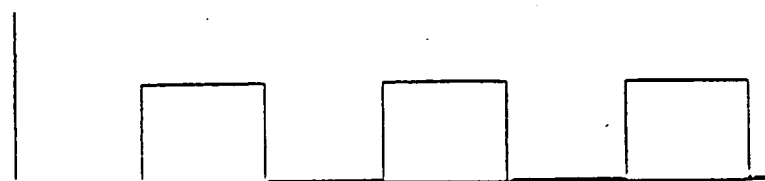

NORed Output
and power switching
control signal

Fig.4E.


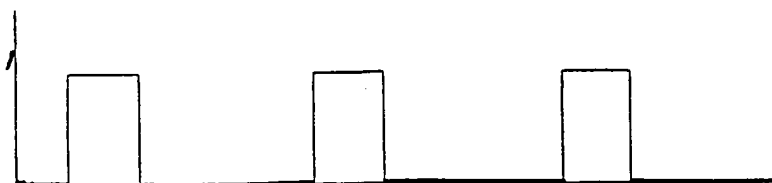


Fig.4F.

I_D

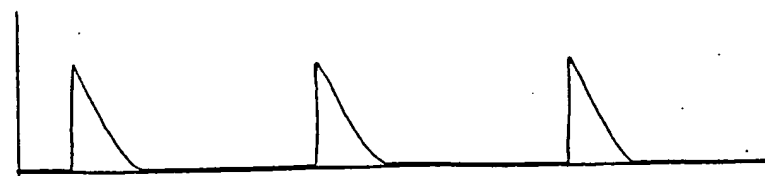

INTERNATIONAL SEARCH REPORT

Int. Jonal Application No

PCT/GB 94/01504

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61B17/39

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 325 456 (GOBLE) 26 July 1989 cited in the application see abstract; figure 1 ---	1
A	US,A,4 376 623 (PITTROFF) 15 March 1983 see abstract; figure 1 ---	1
A	GB,A,2 164 473 (C.R.BARD) 19 March 1986 see abstract; figure 1 ---	1
A	FR,A,2 313 708 (SYBRON CORP.) 31 December 1976 see claim 1; figure 1 -----	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

7 November 1994

Date of mailing of the international search report

15. 11. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Papone, F

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/GB 94/01504

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0325456	26-07-89	GB-A, B 2214430 US-A- 5099840	06-09-89 31-03-92
US-A-4376623	15-03-83	NONE	
GB-A-2164473	19-03-86	US-A- 4727874 AU-B- 585888 AU-A- 4715285 CA-A- 1265205 DE-A- 3531576 JP-A- 61124266	01-03-88 29-06-89 20-03-86 30-01-90 28-05-86 12-06-86
FR-A-2313708	31-12-76	US-A- 4024467 CA-A- 1064581 DE-A- 2619081	17-05-77 16-10-79 23-12-76